

# SmartFrame *Red Alert* wall framing



- ☑ Strong and light Smart LVL 12
- ☑ JD4 joint group
- ☑ Straight, no twists and warps
- ☑ Coloured Red for easy identification
- ☑ Glue-line H2S treated to AS/NZS 1604.4 (H2 treatment available for North of the Tropic of Capricorn)
- ☑ Sizes 70, 90, 140 and 190 x 35 mm
- ☑ Lengths 2.4 -12.0 m (please check availability on lengths greater than 9.0 m)

# Design tables

## 1. Wall studs

Characteristic properties			
Bending	$f'_b$	46	MPa
Compression parallel	$f'_c$	30	MPa
Edge shear	$f'_s$	4.5	MPa
Modulus of Elasticity	E	12,000	MPa

Design loads			
Roof dead load	40	kg/m <sup>2</sup> (sheet)	
Roof dead load	90	kg/m <sup>2</sup> (tile)	
Roof live load	0.25	kPa	
Floor dead load:	40	kg/m <sup>2</sup> (sheet)	
Floor live load	1.5	kPa	
Wall dead load	30	kg/m <sup>2</sup>	
Wind speed:	N3		


Design criteria/assumptions:	
1) Double studs are nail laminated	
2) Reduced $f'_b$ by 40% for notched stud	
3) Reduced $f'_c$ & $f'_t$ by 22% for notched stud	
4) Studs are assumed laterally restrained by noggings	
5) Maximum 450 mm stud spacing	
6) Rafter/truss spacing - up to 600 mm for tile & 900 mm for sheet roof	
7) Maximum 600 mm floor joist spacing	
8) Upper wall height is assumed to be the same as the lower wall height	

### Common wall studs - (not notched)

Size	Stud height (m)	Maximum recommended RLW (m)	
		Sheet roof (40 kg/m <sup>2</sup> ) Max 900 mm truss spacing	Tile roof (90 kg/m <sup>2</sup> ) Max 600 mm truss spacing
70x35	up to 2.7 m	Floor load width up to <b>4.5 m</b>	
		10.0	8.5
	2.7 - 3.0 m	Floor load width up to <b>2.0 m</b>	
90x35	up to 3.0 m	3.0	2.5
		Floor load width up to <b>4.5 m</b>	
		10.0	10.0

### Common wall studs - (maximum 20 mm notch into the depth for bracing element)

Size	Stud height (m)	Maximum recommended RLW (m)	
		Sheet roof (40 kg/m <sup>2</sup> ) Max 900 mm truss spacing	Tile roof (90 kg/m <sup>2</sup> ) Max 600 mm truss spacing
70x35	up to 2.7 m	Floor load width up to <b>2.0 m</b>	
		2.5	2.0
	2.7 - 3.0 m	Floor load width up to <b>2.0 m</b>	
90x35	up to 2.7 m	NS	NS
		Floor load width up to <b>4.5 m</b>	
	2.7 - 3.0 m	10	10
		Floor load width up to <b>4.5 m</b>	
		6.7	5.4

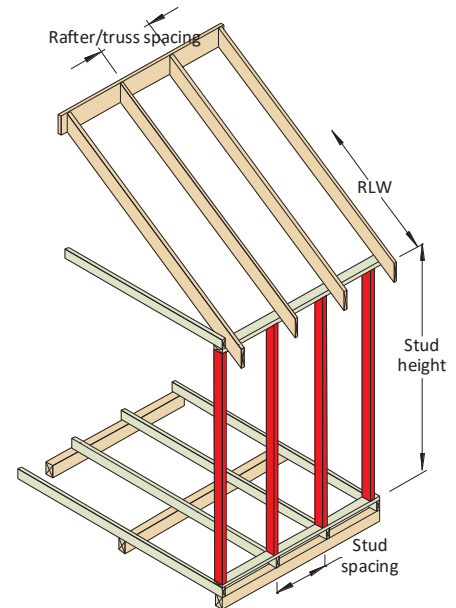


### Jamb studs - (not notched)


Size	Jamb stud height (m)	Roof load width (m)	Maximum recommended opening width (m)					
			Sheet roof (Max 900 mm truss spacing)			Tile roof (Max 600 mm truss spacing)		
			No floor	2.0 m FLW	4.5 m FLW	No floor	2.0 m FLW	4.5 m FLW
2/70x35	up to 2.7 m	1.5	2.1	1.9	1.6	2.0	1.8	1.5
		4.5	1.7	1.5	1.4	1.6	1.4	1.3
		7.5	1.4	1.3	1.1	1.3	1.2	1.0
	2.7 - 3.0 m	1.5	1.3	1.2	1.1	1.2	1.1	1.0
		4.5	1.1	1.0	0.8	1.0	0.9	0.7
		7.5	0.8	0.7	0.6	0.7	0.6	0.5
2/90x35	up to 2.7 m	1.5	4.1	3.8	3.4	4.0	3.7	3.3
		4.5	3.5	3.2	2.9	3.2	3.0	2.8
		7.5	3.0	2.8	2.6	2.7	2.5	2.3
	2.7 - 3.0 m	1.5	3.2	3.0	2.7	3.1	2.9	2.7
		4.5	2.8	2.6	2.4	2.6	2.5	2.3
		7.5	2.4	2.3	2.1	2.2	2.1	2.0

### Studs supporting concentrated loads - (not notched)

Size	Jamb stud height (m)	Maximum recommended roof area supported (m <sup>2</sup> )					
		Sheet roof (40 kg/m <sup>2</sup> )			Tile roof (90 kg/m <sup>2</sup> )		
		No floor	5 m <sup>2</sup> floor	10 m <sup>2</sup> floor	No floor	5 m <sup>2</sup> floor	10 m <sup>2</sup> floor
2/70x35	up to 2.7 m	30	25	22	20	18	15
	2.7 - 3.0 m	16	13	9	12	9	6
2/90x35	up to 2.7 m	44	40	37	31	28	25
	2.7 - 3.0 m	38	34	30	27	24	21

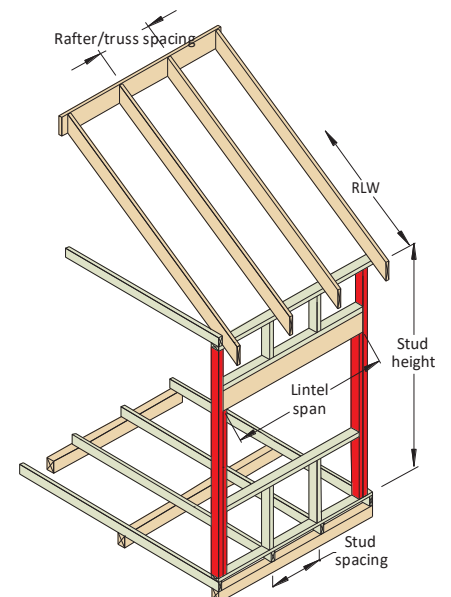

## 2. Single and upper storey lintels

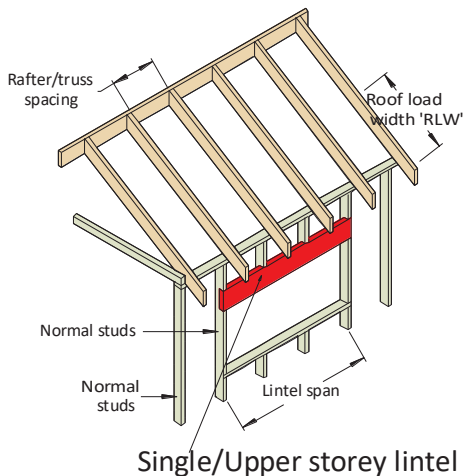


Roof load width (mm)		1500		3000		4500		6000		7500	
Rafter/truss spacing (mm)		600	1200	600	1200	600	1200	600	1200	600	1200
Size DxB (mm)	Roof mass (kg/m <sup>2</sup> )	Maximum recommended lintel span (mm)									
90x35	40	1700	1500	1400	NS	NS	NS	NS	NS	NS	NS
	90	1300	NS	1000	NS	NS	NS	NS	NS	NS	NS
140x35	40	2700	2700	2100	2100	1800	NS	1600	NS	NS	NS
	90	2000	2000	1600	1400	1400	NS	NS	NS	NS	NS
190x35	40	3400	3400	2900	2900	2500	2600	2300	1400	1700	NS
	90	2800	2800	2200	2200	1900	1400	1700 <sub>5</sub>	NS	1100	NS

NOTES:

1. D = member depth, B = member breadth, NS = not suitable.
2. Minimum bearing length = 70 mm at end supports. Subscript values indicate the minimum additional bearing length where required to be greater than 70 mm.

## 3. Lower storey lintels

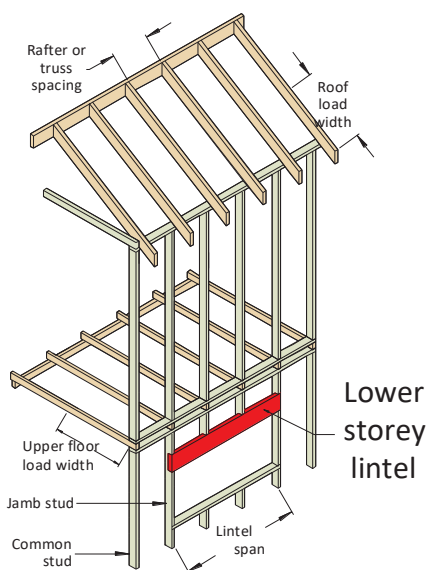

Roof load width (mm)	1500			3000			4500			6000		
Upper floor load width (mm)	1200	2400	3600	1200	2400	3600	1200	2400	3600	1200	2400	3600
Size DxB (mm)	Maximum recommended lintel span (mm)											
	Sheet roof											
140x35	1500	1400	1300	1400	1300	1200	1400	1300	1200	1300	1200	1100
190x35	2100	1900	1700 <sub>15</sub>	2000	1800	1700 <sub>15</sub>	1900	1700 <sub>5</sub>	1600 <sub>15</sub>	1800	1700 <sub>10</sub>	1600 <sub>20</sub>
Tile roof												
140x35	1400	1300	1200	1300	1200	1100	1200	1100	1100 <sub>5</sub>	1100	1100 <sub>5</sub>	1000 <sub>10</sub>
190x35	1900	1800	1600 <sub>15</sub>	1800	1600 <sub>10</sub>	1500 <sub>20</sub>	1600 <sub>10</sub>	1500 <sub>20</sub>	1500 <sub>30</sub>	1500 <sub>20</sub>	1500 <sub>30</sub>	1400 <sub>35</sub>

NOTES:

1. D = member depth, B = member breadth, NS = not suitable.
2. Total upper floor mass of 40 kg/m<sup>2</sup>, Total wall mass of 37 kg/m<sup>2</sup>, Floor live load of 1.5 kPa, Floor point load of 1.8 kN
3. Minimum bearing length = 70 mm at end supports. Subscript values indicate the minimum additional bearing length where required to be greater than 70 mm

## Weather Exposure of LVL wall frames

This document is a subset of the master **SmartLVL Design Guide** which contains a detailed section dealing with **“Durability and exposure to moisture”** for all SmartFrame LVL.

That reference, while not been reproduced in this specific document, is the SmartFrame generic recommendations for the use of LVL in exposed applications, and during temporary exposure during the construction phase.

Only additional or amended recommendations that differ from the master SmartLVL Design Guide for this specific framing use are added in this document.

### Supplementary information - wall frame fabricators

**LVL will swell** if it receives significant moisture ingress, and not all of that swell will be recovered once the LVL's moisture content has stabilised to the equilibrium moisture content typically found in an enclosed house frame in Australia.

For multiple studs, the swelling of individual studs, and the water trapped between touching elements may compound to cause lateral displacement in frames and around openings.

The effect of swell can be reduced by:

1. Keeping the completed frames covered before delivery to

site

2. Under sizing the noggings by 1-2 mm to allow for swelling. Exact length would vary based upon climate, season and accuracy of cut
3. Nogging installation:
  - i. Leave end noggings out of wall frames to require the builders to add at the time of lining to reduce the effect of bowing on frame squareness  
Alternatively
  - ii. Install a sliding end nogging at either the top or bottom of the frame that would be fixed onsite by the builder
4. Use the strength of LVL to:
  - i. Increase stud spacing where applicable
  - ii. minimise the amount of multiple studs under concentrated loads
5. If the design calls for trenched top and bottom plates, the trenches should be overcut by 4 mm to accommodate the swell of the stud
6. Consider a solid timber bottom plate to minimise plate swelling.

## Weather Exposure of wall frames (Cont'd)

### Supplementary Information - Frame installers

1. LVL frames should be enclosed as quickly as reasonable practical, or installed during extended periods of dry weather, to prevent swelling of the LVL sufficient to generate lateral displacement in frames and around openings
2. Maintain good airflow around framing elements and do not allow water to pool on or around element
3. Ensure that floors can drain by creating drainage holes in the floor substrate
4. Remove bottom plates in door openings as soon as possible to prevent longitudinal swelling in the bottom plate of the frames.
5. Install plasterboard lining 10 mm off the floor as per manufacturers' recommendations to allow for swell that may have occurred in the bottom plate.

### Remedial measures for an excessively swelled frame

In the event that framing does get very wet, and construction is to continue immediately, the following remedial steps are recommended:

1. Enclose the frame as soon as possible
2. Knock out noggings in the wall frames to keep the frame end studs straight. Replace noggings before lining once the framing moisture content is below 20%.
3. Do not line the frames until the moisture content is below 20%
4. If planing is deemed necessary, planing of the top and bottom veneers is allowable to return the thickness of the LVL back to original
5. It is NOT recommended to plane back the depth of the LVL as it will shrink back to an undersized member once equalised to internal moisture content conditions.

# SMARTFRAME

## Powered by Innovation

**www.tilling.com.au**

**1300 668 690**

### Tilling Timber Pty Ltd

#### Victoria

31-45 Orchard Street, Kilsyth  
Vic 3137

email: sales@tilling.com.au

Phone +61 3 9725 0222

Fax +61 3 9725 3045

#### New South Wales

109 Kurrajong Avenue,  
Mt Druitt, NSW 2770

email: nswsales@tilling.com.au

Phone +61 2 9677 2600

Fax +61 2 9677 2500

#### Queensland

84 Magnesium Drive,  
Crestmead QLD 4132

email: qldsales@tilling.com.au

Phone +61 7 3440 5400

Fax +61 7 3440 5444

#### Western Australia

10 Cartwright Drive  
Forrestdale WA 6112

email: wasales@tilling.com.au

Phone +61 8 9399 1609

Fax +61 8 9399 1065

#### South Australia

5-9 Woomera Ave  
Edinburgh SA 5111

email: sasales@tilling.com.au

Phone +61 8 8345 1966

Fax +61 8 8345 1977

The information contained in this product brochure is current as at May 2019 and is based on data available to Tilling Timber Pty Ltd at the time of going to print. Tilling Timber Pty Ltd has used its reasonable endeavours to ensure the accuracy and reliability of the information contained in this document and, to the extent permitted by law, will not be liable for any inaccuracies, omissions or errors in this information nor for any actions taken in reliance on this information. Tilling Timber Pty Ltd reserves the right to change the information contained in this document without prior notice. It is important that you call the Tech Support Customer Helpline on 1300 668 690 to confirm that you have the most up to date information available.