



F22 SmartBrace

Introducing a true high performance hardwood ply. SmartBrace is a strong and versatile, H2s or H2 preservative treated engineered wood panel.

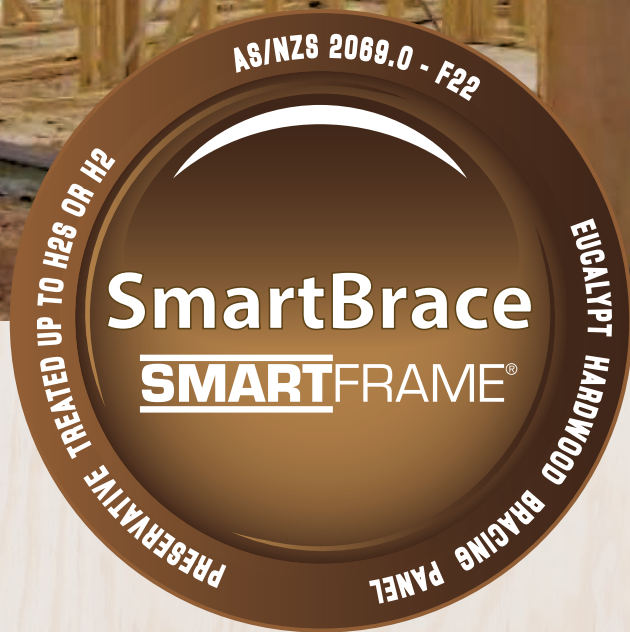


- 4.0mm bracing suitable for brick veneer and lightweight cladding structures.
- New and innovative bracing manufactured from plantation Eucalypt hardwoods.
- SmartBrace is a responsible alternative to tropical rainforest plywoods.
- For uniformity the SmartBrace systems identification in this Design Guide mirrors that of Table 8.18 of AS 1684.2-2010.
- Requires less nailing than some alternatives.

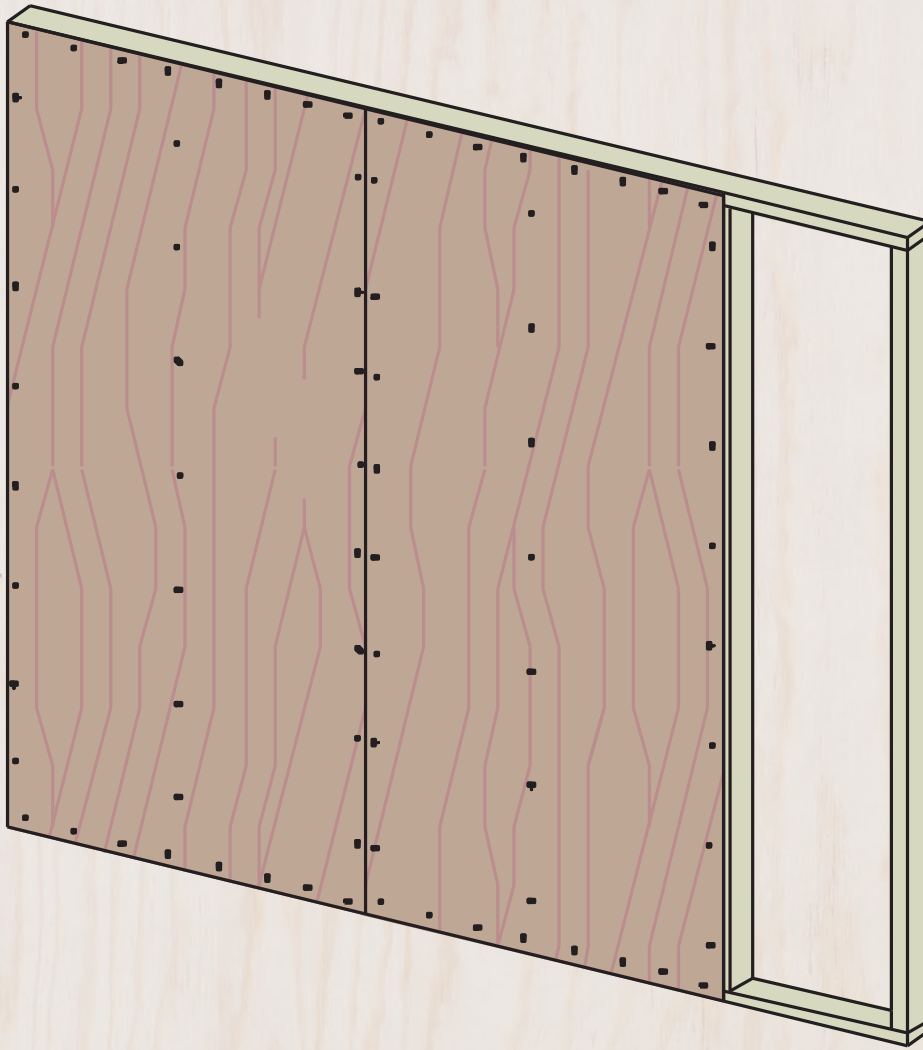

4.0mm F22 Hardwood Bracing

Suitable for
Type (g) 3.4 kN/m
Type (h) Method A 6.4 kN/m
Method B 6.0 kN/m

For studs with JD4 joint strength group,
at 450mm and 600mm spacing.

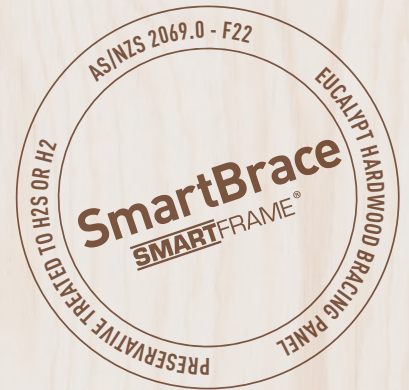

SmartBrace Size Range

4.0mm F22 SmartBrace Size		Pieces per pack	Area per pack (m ²)	Weight/panel (kg)	Weight/pack (kg)
Length (mm)	Width (mm)				
2440	900	150	329.4	5.5	824
2440	1200	150	439.2	7.3	1098
2745	900	150	370.6	6.2	927
2745	1200	150	495.7	8.3	1236
3050	900	150	144.8	6.9	1029
3050	1200	150	549.0	9.2	1373

MELBOURNE
31-45 Orchard Street
Kilsyth VIC 3137
Ph: 03 9725 0222
Fax: 03 9725 3045

NEW SOUTH WALES
109 Kurrajong Avenue
Mt. Druitt NSW 2770
Ph: 02 9677 2600
Fax: 02 9677 2500

SOUTH AUSTRALIA
5-9 Woomera Avenue
Edinburgh SA 5111
Ph: 08 8345 1966
Fax: 08 8345 1977

WESTERN AUSTRALIA
10 Cartwright Drive
Forrestdale WA 6112
Ph: 08 9399 1609
Fax: 08 9399 1065

QUEENSLAND
84 Magnesium Drive
Crestmead QLD 4132
Ph: 07 3440 5400
Fax: 07 3440 5444

Freecall 1300 668 690

smartdata@tilling.com.au

techsupport@tilling.com.au

www.tilling.com.au

