


SPAN TABLE


Red Alert floor joists supporting floor loads ONLY

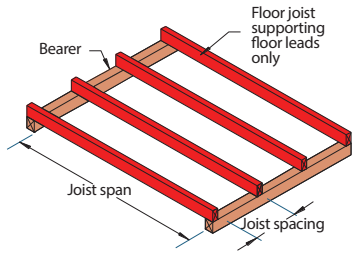

Joist spacing (mm)	300	450	600	300	450	600
Member size (DxB) mm	Maximum recommended Single span (mm)			Maximum recommended Continuous span (mm)		
100 x 45	2200	1850	1700	2750	2150	2000

For these and other span tables please go to <https://www.tilling.com.au/product/red-alert/> or download the span table app, SmartFrame by Tilling Timber.

Red Alert floor bearers supporting joist loads ONLY

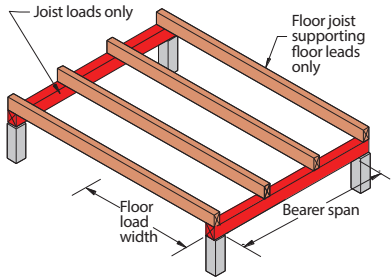

Joist spacing (mm)	300	450	600	300	450	600
Member size (DxB) mm	Maximum recommended Single span (mm)					
100 x 75	1950	1700	1550	1350	1200	1100
Member size (DxB) mm	Maximum recommended Continuous span (mm)					
100 x 75	2450	2150	1950	1650	1400	1250

For these and other span tables please go to <https://www.tilling.com.au/product/red-alert/> or download the span table app, SmartFrame by Tilling Timber.

Red Alert will perform in termite prone areas south of the Tropic of Capricorn.

- High
- Low
- Moderate
- Very Low
- Low-Moderate
- Negligible



Red Alert



Red Alert Bearers and Joists

- Strong and light LVL
- JD4 joint group
- Straight; no twists or warps
- Coloured **Red** for easy identification
- Glue-line H2S termite treated to AS/NZS 1604.4
- Sizes: 100 x 45 & 100 x 75mm
- Lengths: 3.0 - 12.0m

If the length you are looking for is not in the racks please seek assistance at the Trade Desk.

Please note: This product is not suitable for open decking applications.

For more product information visit
www.tilling.com.au/product/red-alert/

